


Σελίδα προϊόντος

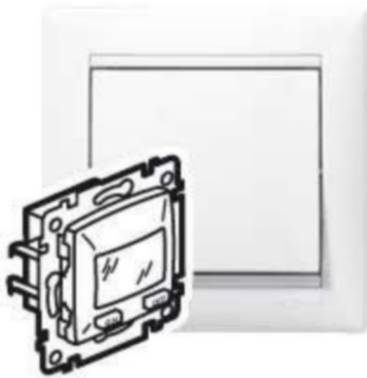

VALENA LEGRAND

Valena™ - Ανιχνευτής Κίνησης 240W χωρίς Ουδέτερο , λευκό

ΚΩΔ. 774229 | EAN. 3414970978172

Valena™ - Ανιχνευτής Κίνησης 300W χωρίς Ουδέτερο 230 V A.C. - 50/60 Hz. Ρύθμιση φωτεινότητας: 3 έως 1000 lux. 60-300 W για λαμπτήρες πυρακτώσεως και ιωδίνης 230 VA.C. Χρονική ρύθμιση: 6 sec έως 6 min.

Εγγύηση 2 χρόνια

[> Επισκεφθείτε τον e-κατάλογο](#)

Κύρια περιγραφή:

Valena™ - Ανιχνευτής Κίνησης 300W χωρίς Ουδέτερο 230 V A.C. - 50/60 Hz. Ρύθμιση φωτεινότητας: 3 έως 1000 lux. 60-300 W για λαμπτήρες πυρακτώσεως και ιωδίνης 230 VA.C. Χρονική ρύθμιση: 6 sec έως 6 min.

Τεχνικά Χαρακτηριστικά

Model	Movement sensor
Sensor type	Passive infrared
With DALI interface	No
Constant light control	No
HVAC-control	No
Forced switch off	Yes
Animal zone	No
Creep-under protection	No
Background monitoring	No
Networkable	No
Optimum mounting height	1.2 m
Staircase light controller	Yes
Bridging switch	No
Max. reach sideways	6 m
Max. reach frontally	8 m

Degree of protection (IP)	IP41
Degree of impact strength (IK)	IK04
Voltage type	AC
Frequency	47-63 Hz
Nominal voltage	230-230 V
Min. switch-on time	10 s
Max. duty cycle	10 min
Switch-off delay	0 s
Switching-on delay	0 s
Detection angle horizontal	120-120 °
Pivoting range sensor, horizontal	0-0 °
Pivoting range sensor, vertical	0-0 °
Response value luminosity	5-1275 lx
Max. switching power	250 W
Suitable for C-load	Yes

Diameter reach on floor	6 m
Suitable for wireless transmission	No
Remote operation	No
Supplied remote control	No
Response value sensitivity adjustable	No
Response value luminosity adjustable	Yes
With signal unit	No
Teach-function for response value luminosity	No
Dim function with dimmer basic element	No
Mounting method	Flush-mounted
Connection type	Screwed terminal
Material	Plastic
Material quality	Thermoplastic
Halogen free	Yes
Surface protection	Lacquered
Surface finishing	Glossy
Antimicrobial treatment	No
Colour	White
RAL-number (similar)	9003
Transparent	No

Temperature	-5-45 °C
Number of switching zones	1
Substation input	No
With alarm function	No
With acoustic sensor	No
Width	71 mm
Height	71 mm
Depth	34 mm
Built-in depth	34 mm
With connection cable	No
Connection cable length	0 mm
Compatible with Apple HomeKit	No
Compatible with Google Assistant	No
Compatible with Amazon Alexa	No
IFTTT support available	No
Operating / setting temperature	-5-45 °C
Storage temperature	-20-70 °C
Terminals capacity	2.5-2.5 mm ²
Auto switch	Yes

Έντυπα

Τεχνικά εγχειρίδια

LE09811AB.pdf | PDF (1.04Mo)

CAD & σχεδιαστικά / BIM

774129_AllCATPart.stp | IFC (14.88Mo)